



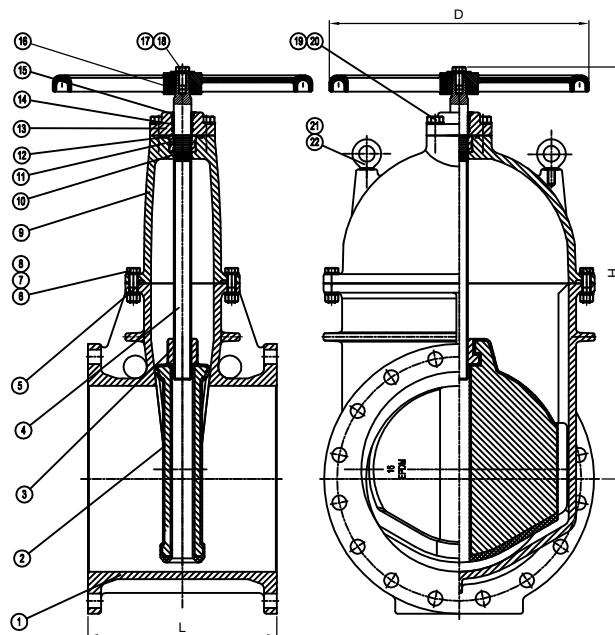

Size	L	H	D
14"	15"	32.87"	22"
16"	16"	35.83"	22"
18"	17"	41.34"	24"
20"	18"	44.09"	24"
24"	20"	50.79"	30"

No.	Description	Material Specifications
1	Body	Ductile Iron, ASTM A536 65-45-12
2	Wedge	Ductile Iron, EPDM Encapsulated
3	Wedge Nut	Bronze, ASTM C95200
4	Stem	Stainless Steel, AISI 431
5	Gasket	EPDM
6	Bolts	Carbon Steel, ASTM A307B
7	Nuts	Carbon Steel, ASTM A307B
8	Washers	Carbon Steel, Zinc Plated
9	Bonnet	Ductile Iron, ASTM A536 65-45-12
10	O-Ring	EPDM
11	Thrust Collar	Bronze, ASTM C95200
12	O-Ring	EPDM
13	Gland	Ductile Iron, ASTM A536 65-45-12
14	O-Ring	EPDM
15	Dustproof Ring	NBR
16	Handwheel	Ductile Iron, ASTM A536 65-45-12
17	Bolt	Carbon Steel, Zinc Plated
18	Washers	Carbon Steel, Zinc Plated
19	Bolts	Carbon Steel, ASTM A307B
20	Washers	Carbon Steel, Zinc Plated
21	Eyebolts	Carbon Steel, ASTM A307B
22	Washers	Carbon Steel, Zinc Plated

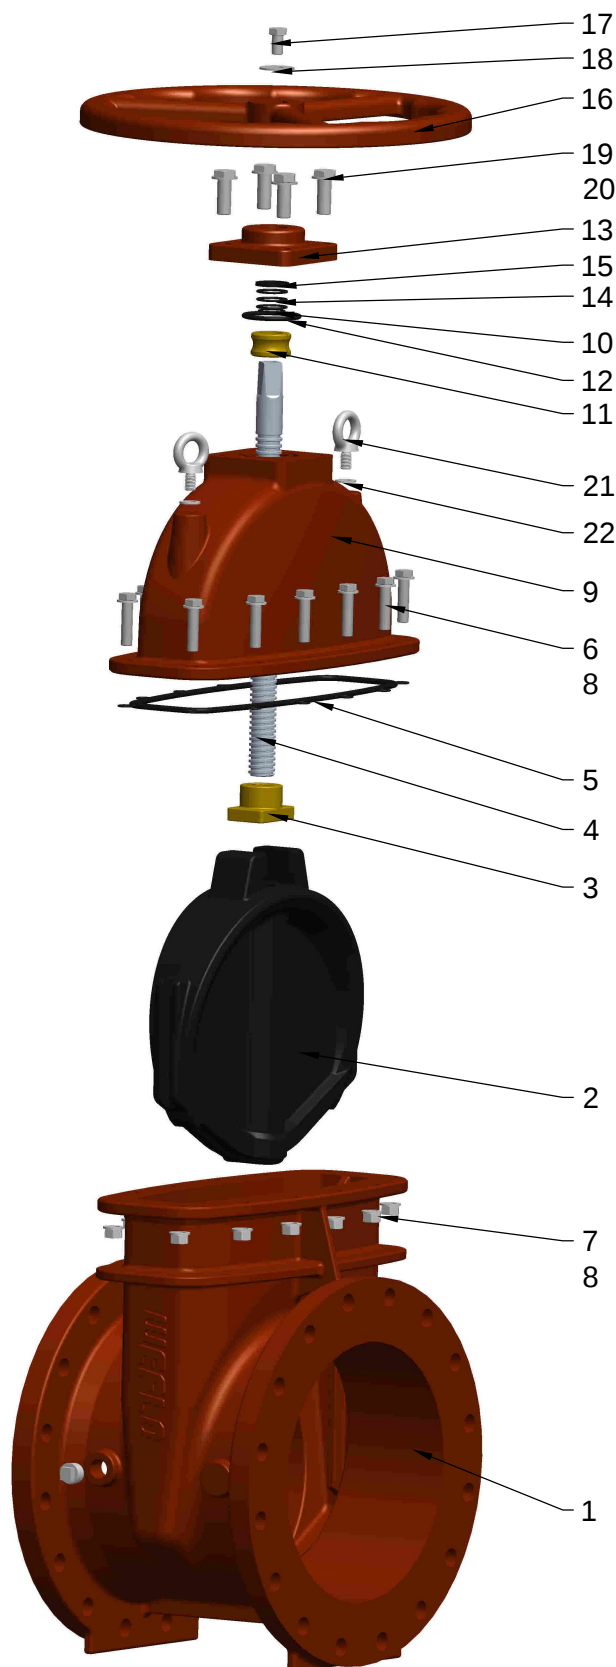

NRS GATE VALVE 14"-24" WITH HANDWHEEL

F1211-200&250

WEFLO

WEFLO VALVE LLC

E-mail: info@weflovalve.com

Website: www.weflo.com / www.weflovalve.com