



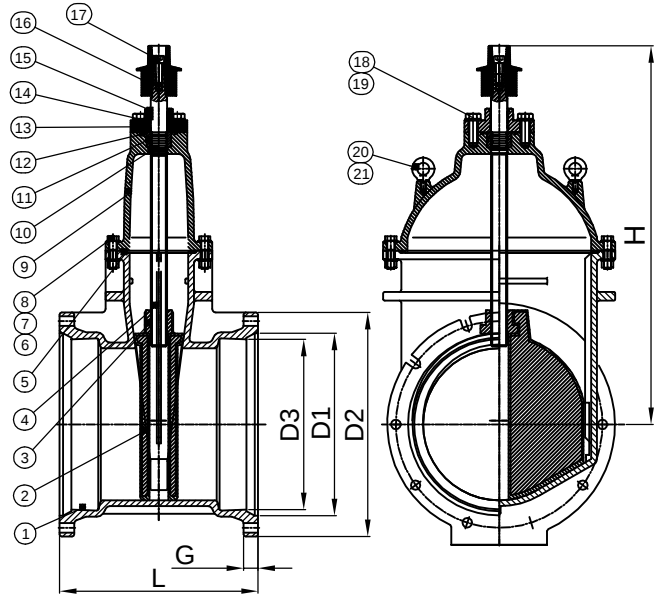

SIZE	L	D2	D1	D3	G	H	D0
14"	17.0	20.3	16.5	15.4	0.79	35.6	22.0
16"	17.0	22.6	18.6	17.5	0.85	38.5	22.0
18"	18.7	24.8	20.7	19.6	1.00	44.0	24.0
20"	18.0	27.1	22.8	21.7	1.02	47.0	24.0
24"	20.0	32.6	27.0	25.9	1.02	52.8	30.0

Item	Description	Material	ASTM Spec.
1	Body	Ductile Iron	A536 65-45-12
2	Disc	DI EPDM Encapsulated	A536 65-45-12
3	Wedge Nut	Bronze	ASTM C95200
4	Stem	Stainless Steel	AISI 304
5	Gasket	Rubber	EPDM
6	Bolt	Carbon Steel	ASTM A307B
7	Nuts	Carbon Steel	ASTM A307B
8	Washer	Stainless Steel	SS304
9	Bonnet	Ductile Iron	A536 65-45-12
10	O-Ring	Rubber	NBR
11	Thrust Washer	Bronze	ASTM C95200
12	O-Ring	Rubber	NBR
13	Gland	Ductile Iron	A536 65-45-12
14	O-Ring	Rubber	NBR
15	Dust Proof Ring	Rubber	NBR
16	Operating Nut	Ductile Iron	A536 65-45-12
17	Bolt	Carbon Steel	ASTM A307B
18	Bolt	Carbon Steel	ASTM A307B
19	Washer	Carbon Steel	Zinc Plated
20	Lifting Bolt	Carbon Steel	ASTM A307B
21	Washer	Carbon Steel	Zinc Plated

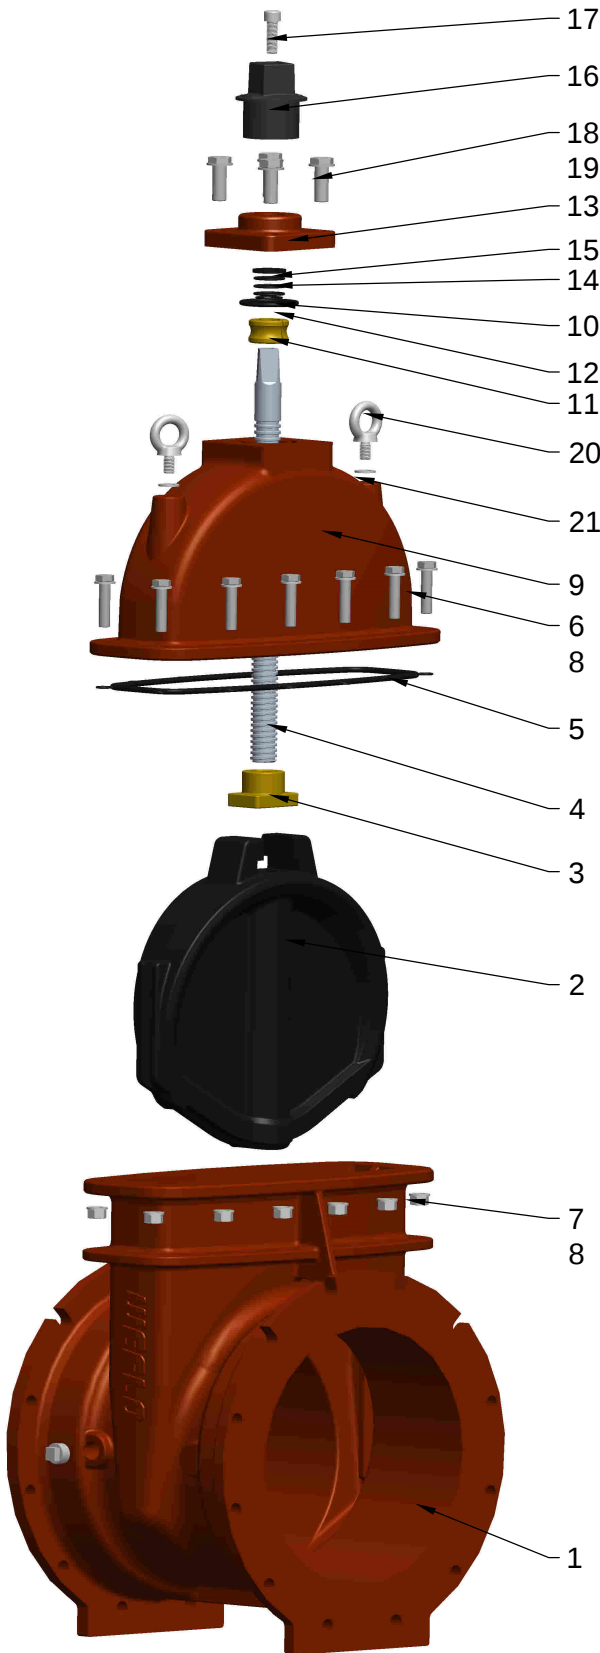

NRS GATE VALVE 14"-24" WITH OPERATEING NUT

F0233-200&250

WEFLO

WEFLO VALVE LLC

E-mail: info@weflovalve.com

Website: www.weflo.com / www.weflovalve.com