

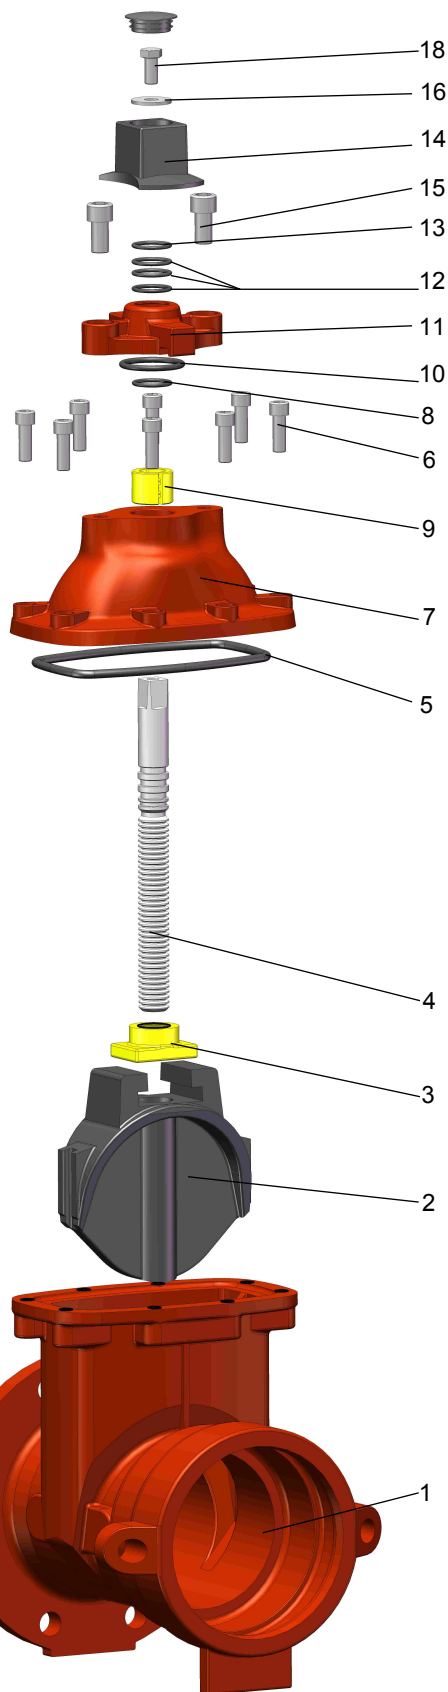


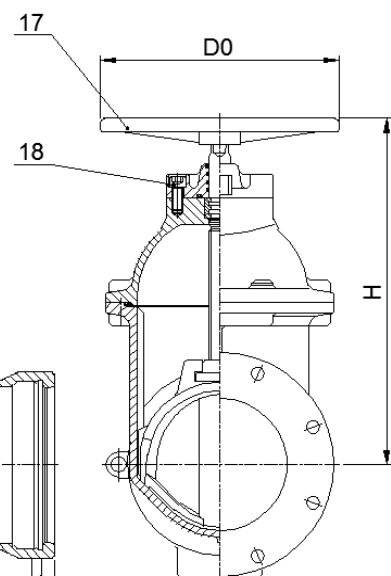

SIZE	L	H	D0
4"	11.5	11.8	10.0
6"	12.6	16.4	12.0
8"	14.6	20.7	14.0
10"	15.7	24.5	16.0
12"	16.3	28.0	16.0

Item	Description	Material	ASTM Spec.
1	Body	Ductile Iron	A536 65-45-12
2	Disc	Ductile Iron EPDM Encapsulated	A536 65-45-12
3	Stem Nut	Bronze	ASTM C95200
4	Stem	Stainless Steel	AISI 431/AISI 304
5	Gasket	Rubber	EPDM
6	Bolt	Stainless Steel	A2-70
7	Bonnet	Ductile Iron	A536 65-45-12
8	O-Ring	Rubber	NBR
9	Thrust Collar	Bronze	ASTM C95200
10	O-Ring	Rubber	NBR
11	Gland	Ductile Iron	A536 65-45-12
12	O-Ring	Rubber	NBR
13	Dust Ring	Rubber	NBR
14	Operating Nut(Optional)	Ductile Iron	A536 65-45-12
15	Bolts	Stainless Steel	A2-70
16	Washer	Stainless Steel	SS304
17	Handwheel(Optional)	Ductile Iron	A536 65-45-12
18	Bolts	Stainless Steel	A2-70

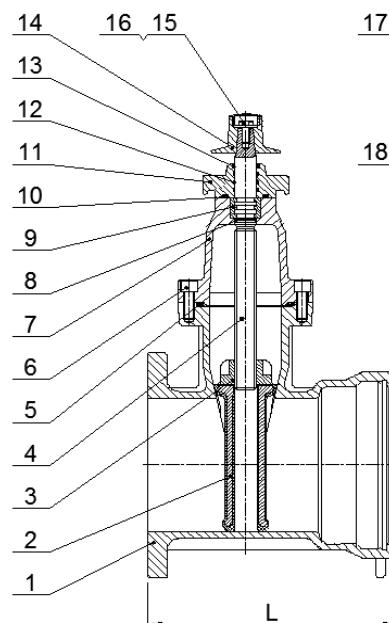

AWWA C515-NRS Resilient Seated Gate Valve-FLxPush on Ends

F0218-300

WEFLO®

WEFLO VALVE LLC

E-mail: info@weflovalve.com

Website: www.weflo.com / www.weflovalve.com