
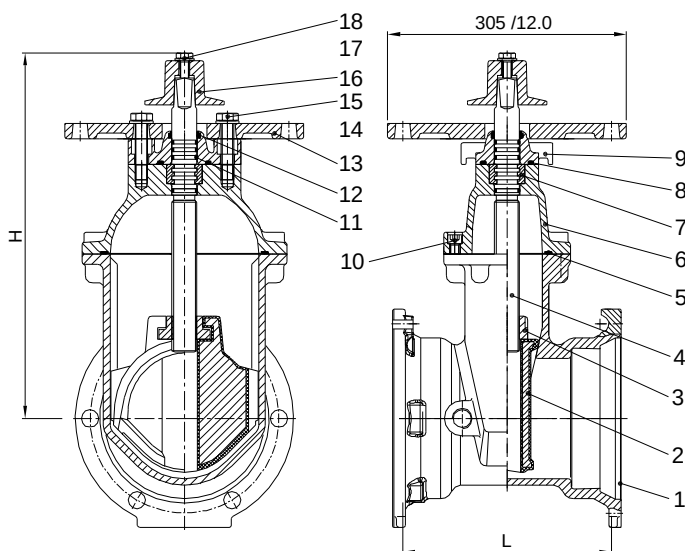
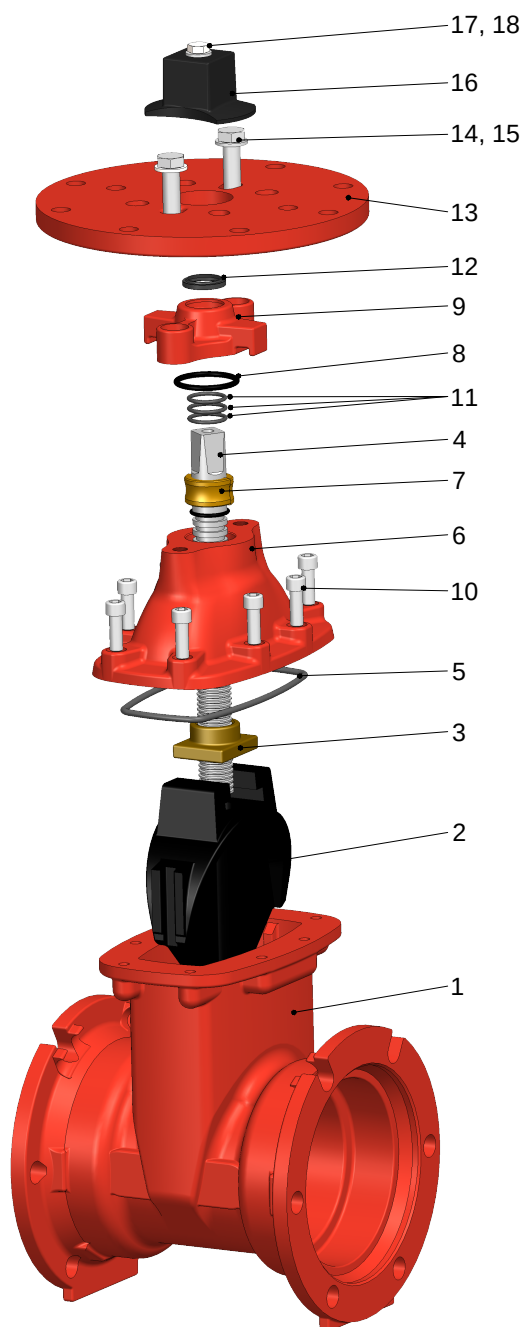


Main Dimensions (mm/inch)

Size	4"	6"	8"	10"	12"
L	254 / 10.0	292 / 11.5	318 / 12.5	375 / 14.8	378 / 14.9
H	370 / 14.6	465 / 18.3	550 / 21.7	640 / 25.2	725 / 28.5
Bolt (No. 14)	M12 / 0.47	M16 / 0.63	M16 / 0.63	M16 / 0.63	M16 / 0.63

Post Plate

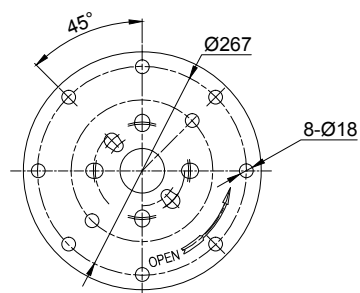

No.	Description	Material	ASTM Specification
1	Body	Ductile Iron	A536 Grade 65-45-12
2	Wedge	EPDM Fully Encapsulated Ductile Iron	
3	Wedge Nut	Bronze	B148 C95200
4	Stem	Stainless Steel	A276 Type 304
5	Gasket	Rubber EPDM	D2000
6	Bonnet	Ductile Iron	A536 Grade 65-45-12
7	Thrust Collar	Bronze	B148 C95200
8	O-Ring	Rubber NBR	D2000
9	Gland	Ductile Iron	A536 Grade 65-45-12
10	Screw	Carbon Steel	A307 Grade B
11	O-Ring	Rubber NBR	D2000
12	Scraper Seal	Rubber NBR	D2000
13	Post Plate	Ductile Iron	A536 Grade 65-45-12
14	Bolt	Stainless Steel	F593 Grade 304
15	Washer	Stainless Steel	A276 Type 304
16	Operating Nut	Ductile Iron	A536 Grade 65-45-12
17	Bolt	Stainless Steel	F593 Grade 304
18	Washer	Stainless Steel	A276 Type 304

CONFIDENTIAL & PROPRIETARY INFORMATION

THE DATA CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF WEFLO VALVE LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF WEFLO VALVE LLC IS PROHIBITED.

WEFLO®

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM

MATERIAL

WEIGHT

FINISH

DO NOT SCALE DRAWING

TITLE:

GA Drawings of NRS Resilient Gate Valve
with Post Plate

REV.	DESCRIPTION	DATE	BY
A	INITIAL ISSUE	09/16/2021	THX

DWG. NO.

F0233-GA-PF

REVISION

A

SCALE: NONE - UNLESS NOTED

SHEET 1 OF 1

NAME	DATE
ENGINEER/ DRAFTSMAN	THX 09/16/2021
1st CHECK	HXF 09/16/2021
2nd CHECK	SJX 09/16/2021
3rd CHECK	HTX 09/16/2021
4th CHECK	TJF 09/16/2021
APPROVED	ZHT 09/16/2021